



ONLY FOUR BASIC COMPONENTS

- 1) Post
- 2) Post Connector
- 3) Frame Connector
- 4) Shelf

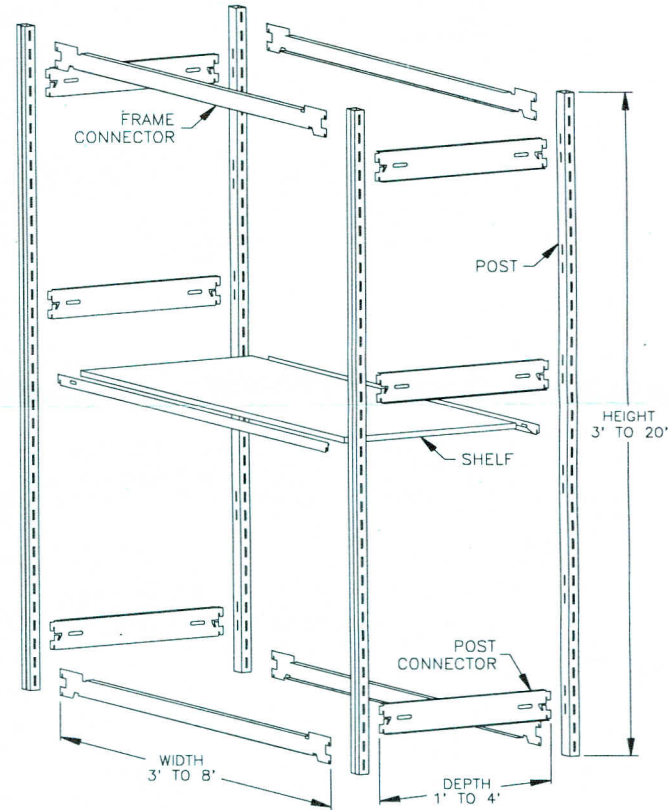

All upright posts are slotted at 2" (51mm) intervals for maximum shelf adjustment.

When designing shelving layouts, allow the following creepage to accommodate outside frame dimensions:
1 1/4" (32mm) for depth of units; 1 1/2" (38mm) for each frame used in a shelving run.

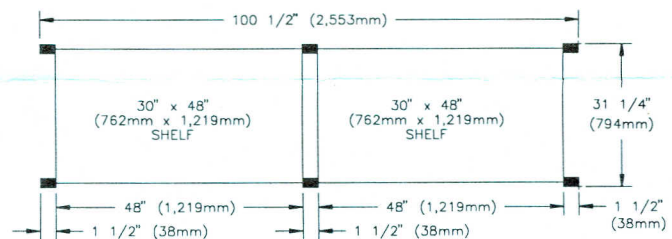

The actual shelf size becomes the unobstructed clear opening and usable shelf space.

Please contact your factory representative for any design, loading, or installation questions outside the scope of these instructions.

Safe Working Loads of up to 10,000lb (4,545kg) per pair of Posts or Bay of Shelving.

Safety Factor of 1.66 to 1.00 Based on Minimum Yield Static Loading Only.

Please note components subject to change without notice.

Manufactured by:

E-Z-RECT MANUFACTURING LTD.

Head Office:



94 Riverside Drive, North Vancouver, B.C. V7H 2M6

Fax: (604) 929-5184 Telephone: (604) 929-5461

Eastern Division:

185 Admiral Blvd., Mississauga, Ontario, L5T 2T3

Fax: (905) 564-0953 Telephone: (905) 564-0890

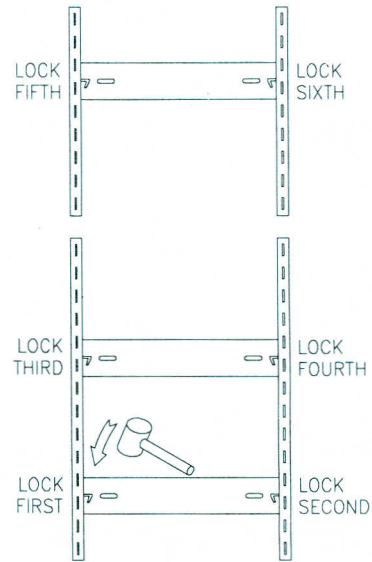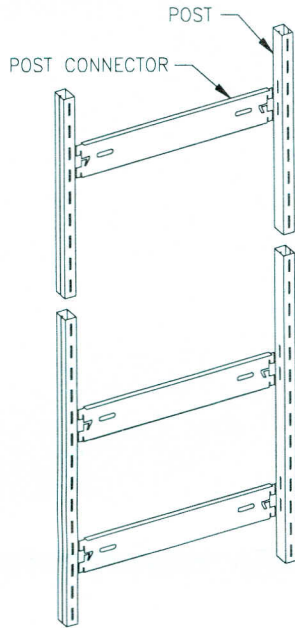

STEP ONE

Place post flat on the ground so that Post Connector slots are on the inside and the seam is on the outside. Post Connector slots are adjustable every 12" (305mm). Arrange Post Connectors at desired location, normally evenly spaced, with one always at top and bottom of post.

STEP TWO

Starting from the bottom tap in one side of the Post Connector and LOCK IMMEDIATELY. Then tap in and lock the other side. The post will have to be spread slightly as you work your way up the post.

Number of Post Connectors Required:		Light to Medium Loads up to 6,000lb (2,727kg) or up to 30" (762mm) in Depth.	Heavy Loads from 6,000lb (2,727kg) to 10,000lb (4,545kg) or 36" (914mm) & over in Depth.
Height of Post			
36"	914mm	2	3
48" to 84"	1,219mm to 2,314mm	3	4
96" to 120"	2,348mm to 3,048mm	4	5
132" to 168"	3,353mm to 4,267mm	5	6
180" to 192"	4,572mm to 4,877mm	7	8

POST CONNECTORS - IMPORTANT TO LOCK


Post connector tabs **MUST** be locked for safety. Post connectors can be unlocked and relocked 4 to 6 times safely. Use a 1/4" or a 3/8" screwdriver or chainsaw wrench to lock connectors. Assembly time is approximately 1 to 2 minutes per 84" (2,134mm) frame.

CDN PATENTED 1991
USA PATENT #5082388
EUROPEAN PATENT #0,572,447 (BELGIUM, FRANCE, GERMANY, SPAIN, UNITED KINGDOM)


NOTE:

Please contact your sales representative or the factory direct for help on shelving assembly, seismic conditions and heights over 192" (4,877mm).


E-Z-Twist Lock

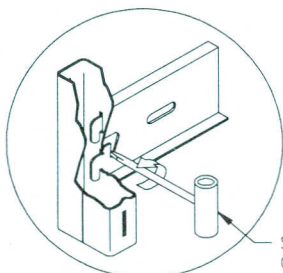

NOT LOCKED

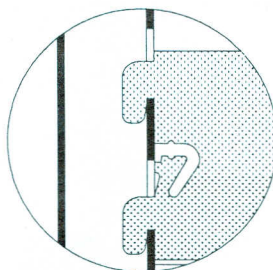

LOCKED

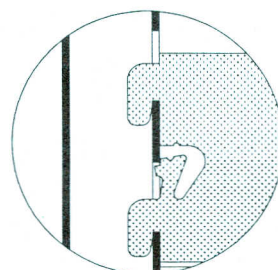

CAUTION - POST CONNECTORS MUST BE LOCKED FOR SAFETY.